

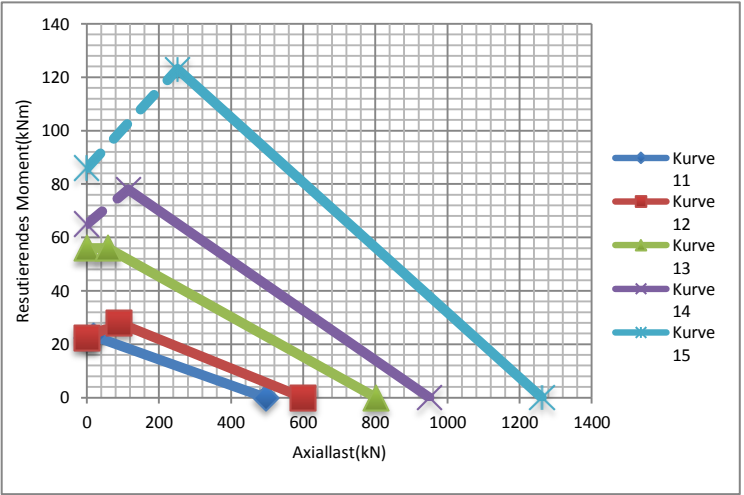
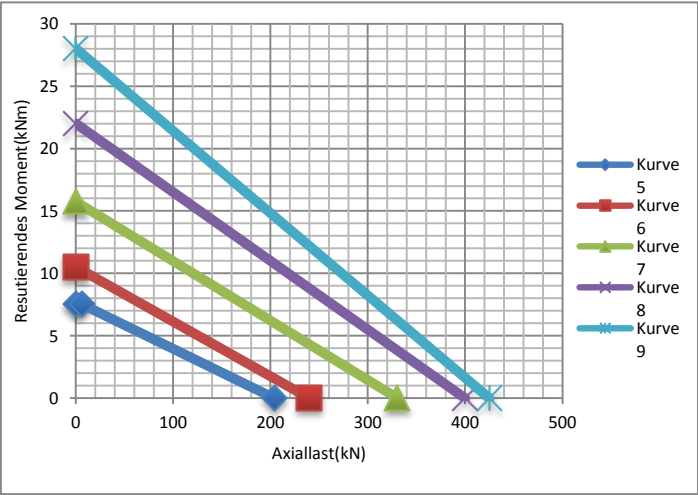


Standard Slewing Bearings

CRB Type	Raceway diameter	Outer diameter	Inner diameter	Overall height	Weight	External bolt circle diameter	Number of external bolt holes	External holes diameter	Internal bolt circle diameter	Number of internal bolt holes	Internal holes diameter	Outer Diameter of inner ring	Inner Diameter of outer ring	Outer ring height	Inner ring height	Module	Number of teeth	Teeth width	Curve
	DL (mm)	Da (mm)	Di (mm)	H (mm)	G (kg)	La (mm)	na	B/M(mm)	Li (mm)	ni	B/M(mm)	O (mm)	U (mm)	H1(mm)	H2(mm)	m	z	b(mm)	
010.14.0226.039.5112	226	300	130	42	13	270	12	M16	170	8	17			35	36				1
010.14.0266.139.5112	266	340	170	41,5	18	310	6	17	200	8	13	261	259	40	34				2
010.14.0325.101.5122	325	380	270	35	12	360	24	11	290	24	11	326	324	30	30				3
010.14.0537.041.5111	537	589	485	42	24,5	570	12	M10	505	12	M10	535	539	40	40				4
010.16.0179.011.5112	179	234	124,5	35	7	214	12	M12	144,5	12	M12	178	180	30	30				5
010.16.0181.001.5112	181	234	125	25	5	214	24	11	144,5	20-1	11	180	182	25	25				6
010.16.0217.121.5111	217	290	150	40	14	265	16	14	175	16-1	M12	216	218	34	36,5				7
010.16.0254.131.5111	254	300	190	30	9,2	282	8	M6	216	6	8	252	256	27	29				8
010.16.0325.001.5112	325	380	270	35	12	360	24	11	290	24	11	326	324	30	30				9
010.16.0700.001.5111	700	780	620	46	75	750	30	13,5	650	30	13,5	698	702	46	46				10
010.20.0220.001.5112	220	302	138	46	16	270	10	18	170	10	18	221	219	41	41				11
010.20.0260.001.5112	260	329	190	45	17	305	16	14	215	16	14	258,5	261,5	44	44				12
010.20.0342.101.5111	342	440	265	50	30	390	16	17,5	295	16	17,5	340	344	44	44				13
010.20.0402.101.5111	402	475	335	45	27	450	24	14	360	24	14	400	404	45	45				14
010.20.0405.001.5112	405	474	336	46	25	450	30	14	360	30	14	406	404	41	41				14
010.20.0530.001.5111	530	600	460	46	35	575	30	14	485	30	14	532	528	41	41				15



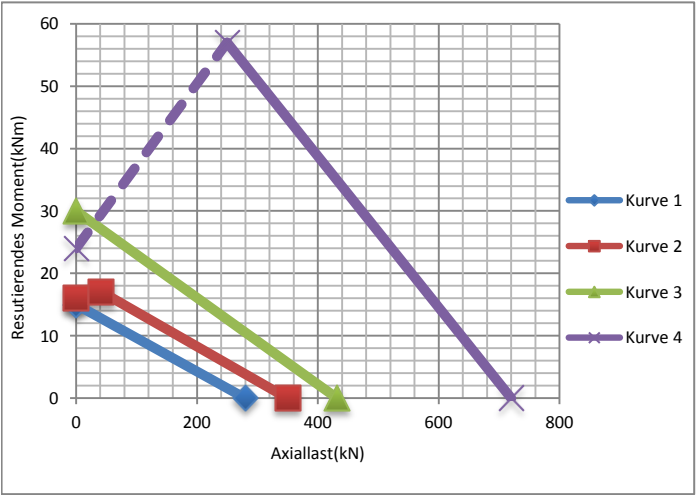


CRB Type	Raceway diameter	Outer diameter	Inner diameter	Overall height	Weight	External bolt circle diameter	Number of external bolt holes	External holes diameter	Internal bolt circle diameter	Number of internal bolt holes	Internal holes diameter	Outer Diameter of inner ring	Inner Diameter of outer ring	Outer ring height	Inner ring height	Module	Number of teeth	Teeth width	Curve
	DL (mm)	Da (mm)	Di (mm)	H (mm)	G (kg)	La (mm)	na	B/M(mm)	Li (mm)	ni	B/M(mm)	O (mm)	U (mm)	H1(mm)	H2(mm)	m	z	b(mm)	
010.20.0314.001.5111	314	386	242	56	22	360	20	14	268	20	14	312,5	315,5	44	44				1
010.20.0414.001.5112	414	486	342	56	29	460	24	14	368	24	14	412,5	415,5	45,5	45,5				2
010.20.0544.001.5112	544	616	472	56	37	590	32	14	498	32	14	542,5	545,5	45,5	45,5				3
010.20.0644.001.5112	644	716	572	56	44	690	36	14	598	36	14	642,5	645,5	45,5	45,5				4
010.20.0744.001.5112	744	816	672	56	52	790	40	14	698	40	14	742,5	745,5	45,5	45,5				5
010.20.0844.001.5112	844	916	772	56	60	890	40	14	798	40	14	842,5	845,5	45,5	45,5				6
010.20.0944.001.5112	944	1016	872	56	67	990	44	14	898	44	14	942,5	945,5	45,5	45,5				7
010.20.1094.001.5112	1094	1166	1022	56	77	1140	48	14	1048	48	14	1092,5	1095,5	45,5	45,5				8
011.20.0314.031.5111	314	404	242	56	24	355	20	M12	268	20	14	312,5	315,5	44	44	5	79	44	1
011.20.0414.031.5112	414	504	342	56	31	455	20	M12	368	24	14	412,5	415,5	45,5	45,5	5	99	45,5	2
011.20.0544.031.5112	544	640,8	472	56	43	585	28	M12	498	32	14	542,5	545,5	45,5	45,5	6	105	45,5	3
011.20.0644.031.5112	644	742,8	572	56	52	685	32	M12	598	36	14	642,5	645,5	45,5	45,5	6	122	45,5	4
011.20.0744.031.5112	744	838,8	672	56	59	785	36	M12	698	40	14	742,5	745,5	45,5	45,5	6	138	45,5	5
011.20.0844.031.5112	844	950,4	772	56	71	885	36	M12	798	40	14	842,5	845,5	45,5	45,5	8	117	45,5	6
011.20.0944.031.5112	944	1046,4	872	56	77	985	40	M12	898	44	14	942,5	945,5	45,5	45,5	8	129	45,5	7
011.20.1094.031.5112	1094	1198,4	1022	56	91	1135	44	M12	1048	48	14	1092,5	1095,5	45,5	45,5	8	148	45,5	8
012.20.0314.021.5111	314	386	225	56	23	360	20	14	275	24	M12	315,5	312,5	44	44	5	47	44	1
012.20.0414.021.5112	414	486	326,5	56	31	460	24	14	375	24	M12	415,5	412,5	45,5	45,5	5	67	45,5	2
012.20.0544.021.5112	544	616	445,2	56	42	590	32	14	505	32	M12	545,5	542,5	45,5	45,5	6	76	45,5	3
012.20.0644.021.5112	644	716	547,2	56	50	690	36	14	605	36	M12	645,5	642,5	45,5	45,5	6	93	45,5	4
012.20.0744.021.5112	744	816	649,2	56	58	790	40	14	705	40	M12	745,5	742,5	45,5	45,5	6	110	45,5	5
012.20.0844.021.5112	844	916	737,6	56	69	890	40	14	805	40	M12	845,5	842,						

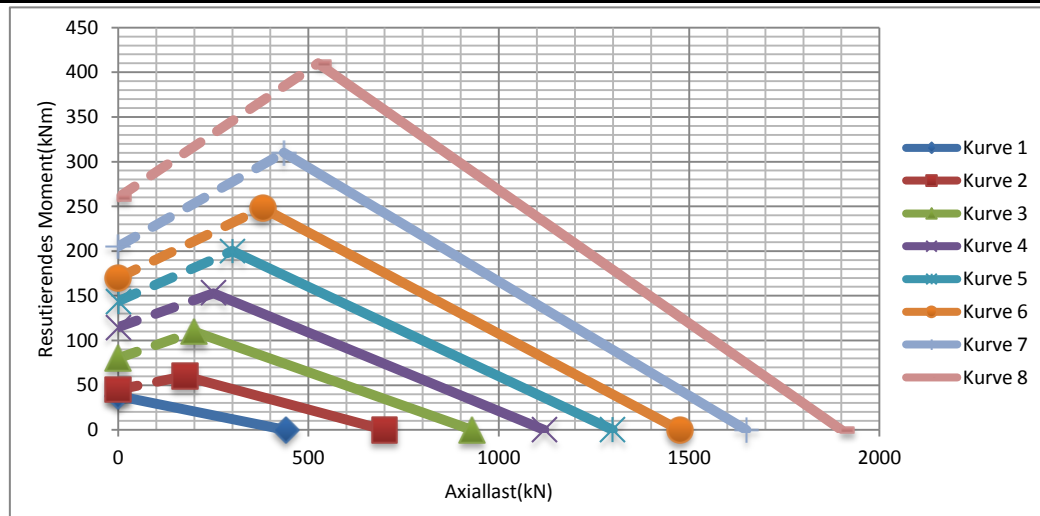




Standard Slewing Bearings

CRB Type	Raceway diameter	Outer diameter	Inner diameter	Overall height	Weight	External bolt circle diameter	Number of external bolt holes	External holes diameter	Internal bolt circle diameter	Number of internal bolt holes	Internal holes diameter	Outer Diameter of inner ring	Inner Diameter of outer ring	Outer ring height	Inner ring height	Module	Number of teeth	Teeth width	Curve
	DL (mm)	Da (mm)	Di (mm)	H (mm)	G (kg)	La (mm)	na	B/M(mm)	Li (mm)	ni	B/M(mm)	O (mm)	U (mm)	H1(mm)	H2(mm)	m	z	b(mm)	
010.22.0308.101.5112	308	390	230	65	28	358	24	14,5	259	28	14,5	306	310	58	58				1
010.22.0370.021.5112	370	456	289	59	35	425	16	17,5	320	16	M16	371	369	50	50				2
010.22.0404.001.5112	404	474	336	46	22	450	30	14	360	30	14	402	406	41	41				3
010.22.0505.021.5112	505	585	425	58	44	555	22	17,5	455	22	M16	506	504	49	49				4
010.22.0575.011.5112	575	655	500	62	52	625	12	M16	525	12	M16	576	574	49	49				5
010.22.0660.021.5112	660	740	580	58	59	710	30	17,5	610	30	M16	657	659	49	49				6
010.25.0310.131.5122	310	410	200	75	32	365	14	19	255	20	19	300	325	57	63				7
010.25.0371.021.5112	371	473	285	63	41	438	16	18	320	16	M16	371	371	54	54				8
010.25.0380.001.5112	380	485	275	55	43	453	16	18	307	16	18	381	379	50	50				8
010.25.0433.001.5112	433	522	344	55	41	490	20	18	376	20	18	434	432	50	50				9
010.25.0761.101.5111	761	875	675	70	119	822	24	26	706	14	20	760	760	60	60				10
010.25.0764.011.5111	764	834	680	82	87	800	48	M16	706	48-1	M16	765	763	65	61				11
010.25.0889.121.5111	889	980	798	82	98	944	36	17,5	850	36	M16	891	887	67	72				12
010.25.0893.150.5111	893	956	800	51	77	-	-	-	825	16	11	882	904	48	47				13
010.25.1090.101.5422	1090	1200	982	68	150	1170	10	18	982	20	18	1092	1089	59	59				14
010.25.2350.101.4111	2350	2450	2250	70	340	2415	26	22	2285	20	22	2348	2352	70	52				15

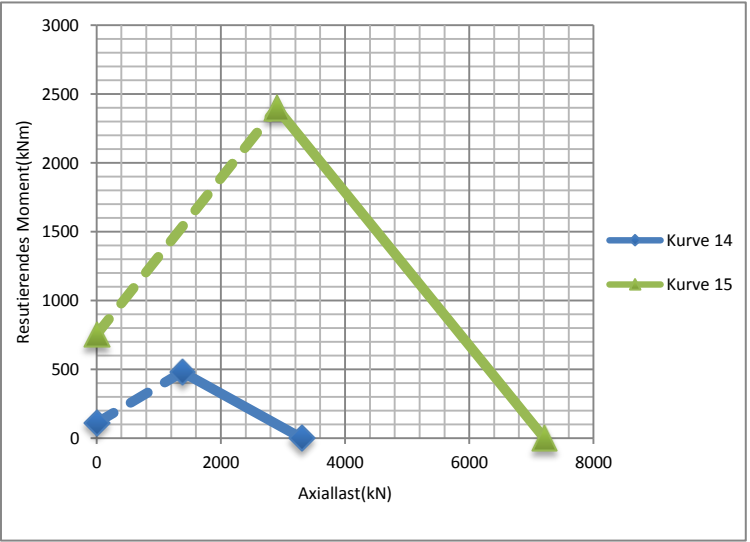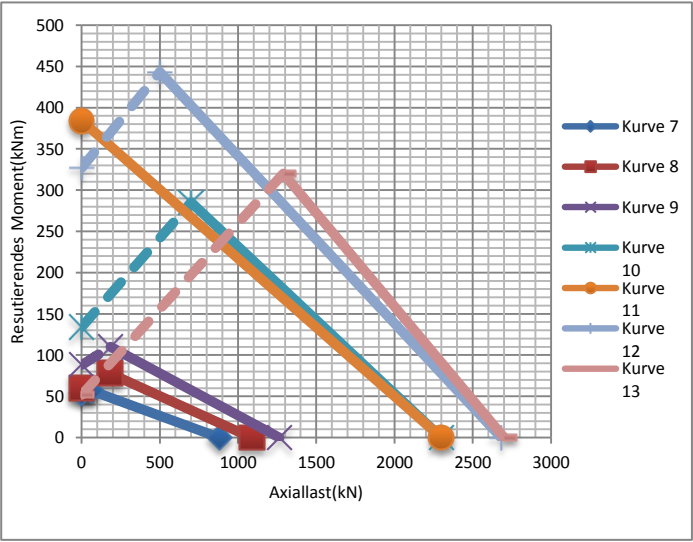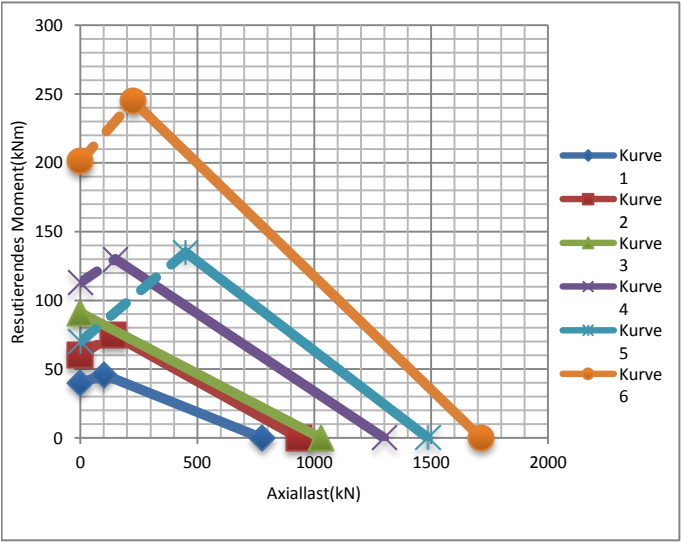


Standard Slewing Bearings

CRB Type	Raceway diameter	Outer diameter	Inner diameter	Overall height	Weight	External bolt circle diameter	Number of external bolt holes	External holes diameter	Internal bolt circle diameter	Number of internal bolt holes	Internal holes diameter	Outer Diameter of inner ring	Inner Diameter of outer ring	Outer ring height	Inner ring height	Module	Number of teeth	Teeth width	Curve
	DL (mm)	Da (mm)	Di (mm)	H (mm)	G (kg)	La (mm)	na	B/M(mm)	Li (mm)	ni	B/M(mm)	O (mm)	U (mm)	H1(mm)	H2(mm)	m	z	b(mm)	
010.32.0360.101.5112	360	455	265	71	45	420	24	17,5	300	24	17,5	358	362	63	63				1
010.32.0474.001.5112	474	577	370	75	68	540	24	17,5	410	24	17,5	472	476	63	63				2
010.32.0525.001.5112	525	626	424	72	70	590	24	22	460	24	22	523	527	63	63				3
010.32.0550.101.5122	550	650	450	75	75	615	24	22	485	24	22	548	552	65	65				4
010.32.0574.101.5122	574	672	480	77	77	640	36	18	508	36-1	18	572	576	64	64				5
010.32.0600.001.5112	600	712	487	72	91	668	24	22	531	24	22	598	602	63	63				6
010.32.0675.001.5112	675	816	573	90	131	753	36	18	604	36-1	18	673	682	73	73				7
010.32.0780.001.5112	780	900	666	85	125	858	32	22	710	32	22	778	782	76	76				8
010.32.0823.101.5111	823	979	717	100	177	893	36	22	753	36-1	22	820	825	79	82				-
010.35.0475.033.5911	475	594	356	80	85	550	24	M20	400	18	22	474	476	71	71				-
010.35.0785.001.4111	785	900	670	86	148	860	36	22	710	36	22			77	77				11
010.35.1230.113.5122	1230	1360	1070	93	335	1315	18	22	1145	18	22	1220	1240	90	90				12
010.35.1355.021.4111	1355	1500	1205	90	346	1460	42	22	1245	42	22	1356,5	1353,5	76	76				13
010.35.2400.039.4111	2400	2535	2265	104	649	2493	40	M24	2317	40	26	2401	2398	76	95				14
010.40.0785.001.5112	785	900	670	86	148	860	36	22	710	36-1	22	783	787	77	77				15
010.40.1585.101.5111	1585	1721	1449	100	430	1667	36	26	1503	36	26			90	90				16
010.45.0980.001.5112	980	1130	845	100	271	1070	36	26	890	36-1	26	978	982	90	90				17
010.45.3940.031.4111	3940	4080	3805	104	1134	4030	27	M20	3855	48	22	3938	3942	95	90				18

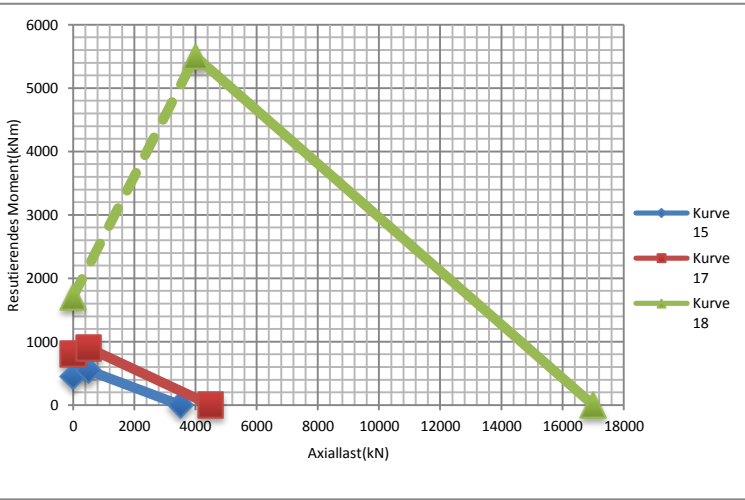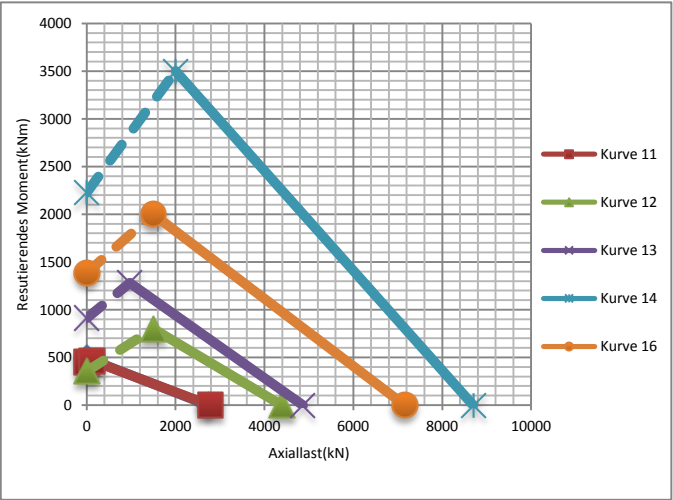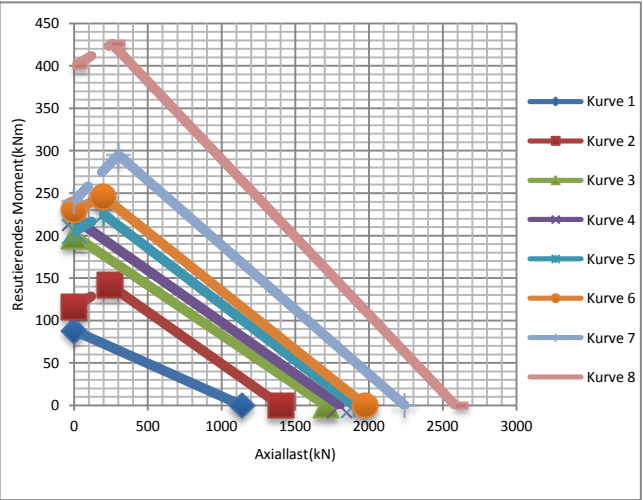


Standard Slewing Bearings

CRB Type	Raceway diameter	Outer diameter	Inner diameter	Overall height	Weight	External bolt circle diameter	Number of external bolt holes	External holes diameter	Internal bolt circle diameter	Number of internal bolt holes	Internal holes diameter	Outer Diameter of inner ring	Inner Diameter of outer ring	Outer ring height	Inner ring height	Module	Number of teeth	Teeth width	Curve
	DL (mm)	Da (mm)	Di (mm)	H (mm)	G (kg)	La (mm)	na	B/M(mm)	Li (mm)	ni	B/M(mm)	O (mm)	U (mm)	H1(mm)	H2(mm)	m	z	b(mm)	
010.25.0455.001.5112	455	555	355	63	53	515	18	22	395	18	22	453	457	44	54				1
010.25.0555.001.5112	555	655	455	63	65	615	20	22	495	20	22	553	557	44	54				2
010.25.0655.001.5112	655	755	555	63	76	715	24	22	595	24	22	653	657	44	54				3
010.25.0755.001.5112	755	855	655	63	90	815	24	22	695	24	22	753	757	44	54				4
011.25.0455.031.5112	455	590,4	355	80	74	516	18	M20	395	18	22	453	457	71	54	8	72	71	1
011.25.0555.031.5112	555	694,4	455	80	93	616	20	M20	495	20	22	553	557	71	54	8	85	71	2
011.25.0655.031.5112	655	798,4	555	80	111	716	24	M20	595	24	22	653	657	71	54	8	98	71	3
011.25.0755.031.5112	755	898	655	80	125	816	24	M20	695	24	22	753	757	71	54	9	98	71	4
012.25.0455.021.5112	455	555	304	80	64	515	18	22	394	18	M20	457	453	54	71	8	40	71	1
012.25.0555.021.5112	555	655	416	80	76	615	20	22	494	20	M20	557	553	54	71	8	54	71	2
012.25.0655.021.5112	655	755	512	80	102	715	24	22	594	24	M20	657	653	54	71	8	66	71	3
012.25.0755.021.5112	755	855	610	80	119	815	24	22	694	24	M20	757	753	54	71	10	63	71	4

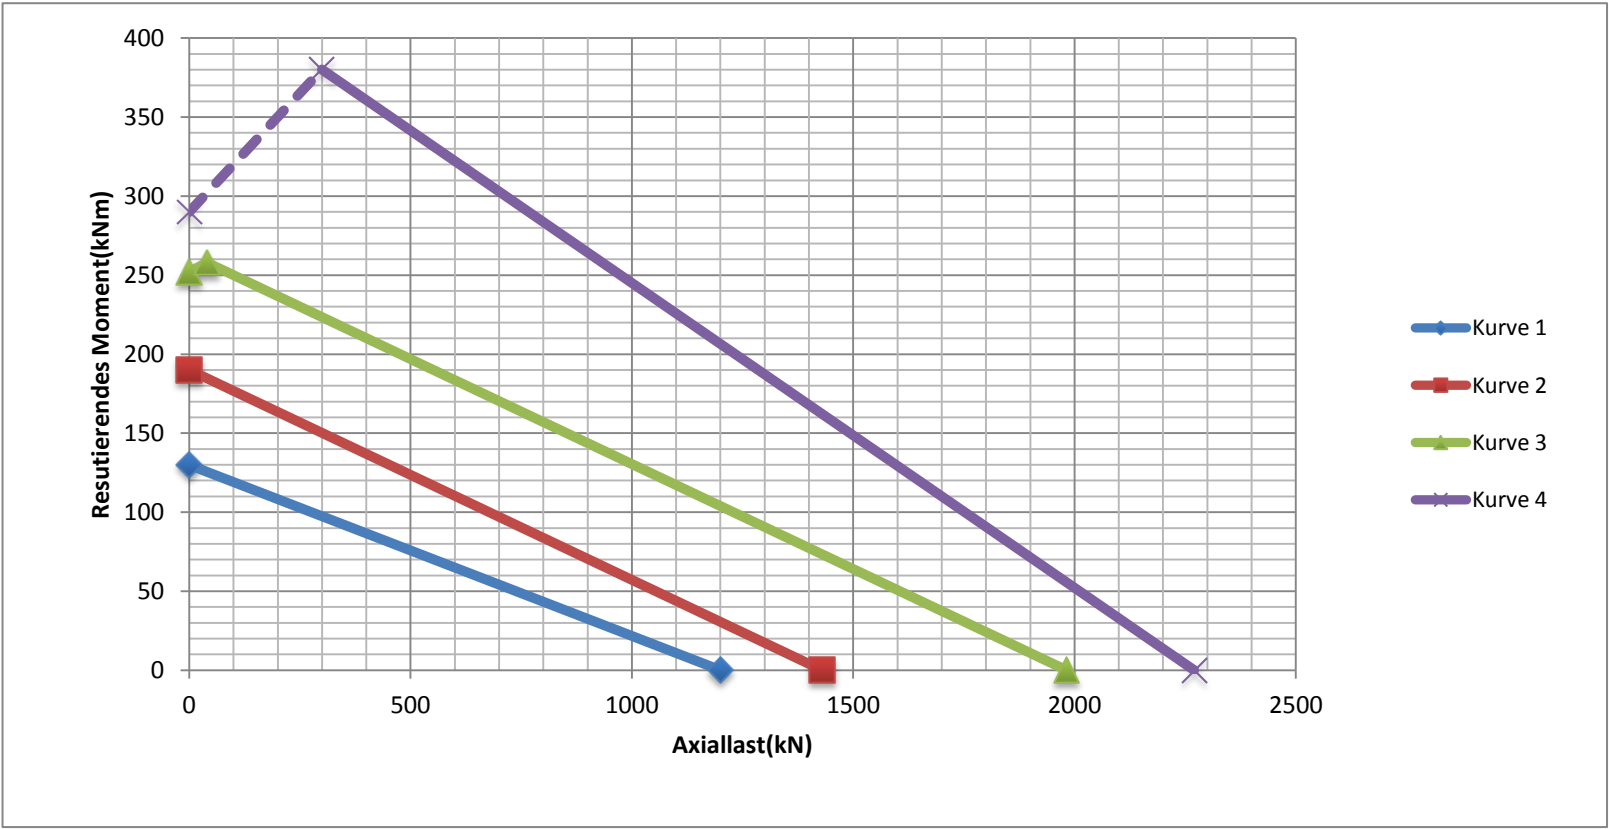




Standard Slewing Bearings

CRB Type	Raceway diameter	Outer diameter	Inner diameter	Overall height	Weight	External bolt circle diameter	Number of external bolt holes	External holes diameter	Internal bolt circle diameter	Number of internal bolt holes	Internal holes diameter	Outer Diameter of inner ring	Inner Diameter of outer ring	Outer ring height	Inner ring height	Module	Number of teeth	Teeth width	Curve
	DL (mm)	Da (mm)	Di (mm)	H (mm)	G (kg)	La (mm)	na	B/M(mm)	Li (mm)	ni	B/M(mm)	O (mm)	U (mm)	H1(mm)	H2(mm)	m	z	b(mm)	
010.25.0855.001.5112	855	955	755	63	100	915	28	22	795	28	22	856	854	54	54				1
010.25.0955.001.5112	955	1055	855	63	113	1015	30	22	895	30	22	956	954	54	54				2
010.25.1055.001.5112	1055	1155	955	63	124	1115	30	22	995	30	22	1056	1054	54	54				3
010.25.1155.001.5112	1155	1255	1055	63	139	1215	36	22	1095	36	22	1156	1154	54	54				4
010.25.1255.001.5112	1255	1355	1155	63	148	1315	42	22	1195	42	22	1256	1254	54	54				5
010.25.1355.001.5112	1355	1455	1255	63	161	1415	42	22	1295	42	22	1356	1354	54	54				6
010.25.1455.001.5112	1455	1555	1355	63	171	1515	48	22	1395	48	22	1456	1454	54	54				7
011.25.0855.031.5112	855	997,2	755	80	141	916	28	M20	795	28	22	856	854	71	54	9	109	71	1
011.25.0955.031.5112	955	1096,2	855	80	158	1016	30	M20	895	30	22	956	954	71	54	9	120	71	2
011.25.1055.031.5112	1055	1198	955	80	172	1116	30	M20	995	30	22	1056	1054	71	54	10	118	71	3
011.25.1155.031.5112	1155	1298	1055	80	190	1216	36	M20	1095	36	22	1156	1154	71	54	10	128	71	4
011.25.1255.031.5112	1255	1398	1155	80	204	1316	42	M20	1195	42	22	1256	1254	71	54	10	138	71	5
011.25.1355.031.5112	1355	1498	1255	80	222	1416	42	M20	1295	42	22	1356	1354	71	54	10	148	71	6
011.25.1455.031.5112	1455	1598	1355	80	236	1516	48	M20	1395	48	22	1456	1454	71	54	10	158	71	7
012.25.0855.021.5112	855	955	710	80	133	915	28	22	794	28	M20	854	856	54	71	10	73	71	1
012.25.0955.021.5112	955	1055	810	80	150	1015	30	22	894	30	M20	954	956	54	71	10	83	71	2
012.25.1055.021.5112	1055	1155	910	80	166	1115	30	22	994	30	M20	1054	1056	54	71	10	93	71	3
012.25.1155.021.5112	1155	1255	1010	80	183	1215	36	22	1094	36	M20	1154	1156	54	71	10	103	71	4
012.25.1255.021.5112	1255	1355	1110	80	198	1315	42	22	1194	42	M20	1254	1256	54	71	10	113	71	5
012.25.1355.021.5112	1355	1455	1210	80	215	1415	42	22	1294	42	M20	1354	1356	54	71	10	123	71	6
012.25.1455.021.5112	1455	1555	1310	80	229	1515	48	22	1394	48	M20	1454	1456	54	71	10	133	71	7

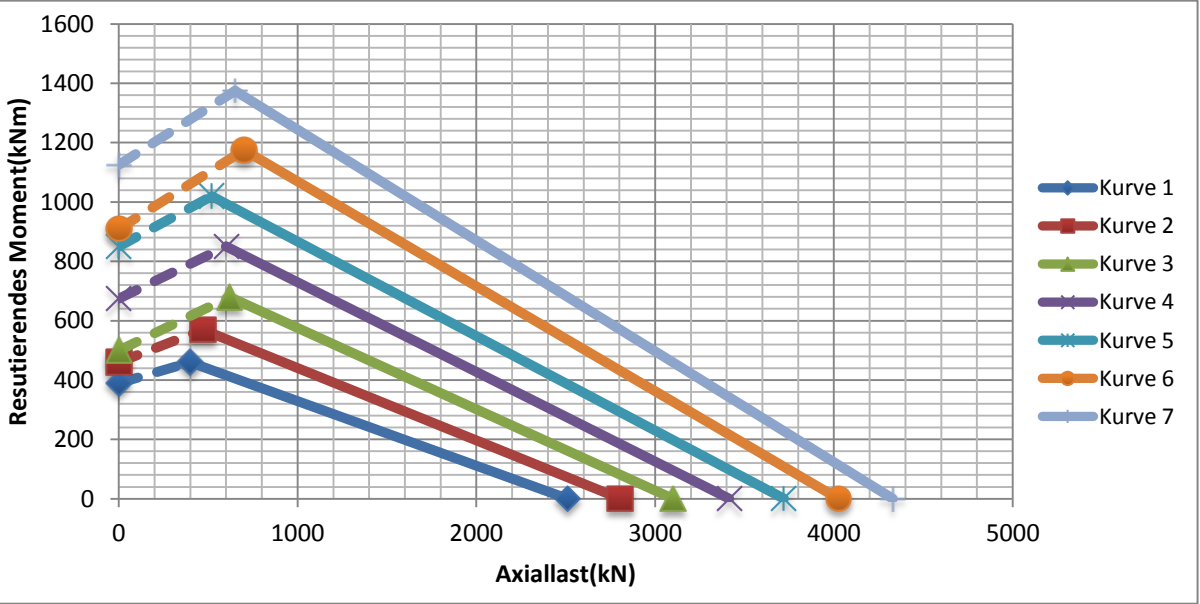




Standard Slewing Bearings

CRB Type	Raceway diameter	Outer diameter	Inner diameter	Overall height	Weight	External bolt circle diameter	Number of external bolt holes	External holes diameter	Internal bolt circle diameter	Number of internal bolt holes	Internal holes diameter	Outer Diameter of inner ring	Inner Diameter of outer ring	Outer ring height	Inner ring height	Module	Number of teeth	Teeth width	Curve
	DL (mm)	Da (mm)	Di (mm)	H (mm)	G (kg)	La (mm)	na	B/M(mm)	Li (mm)	ni	B/M(mm)	O (mm)	U (mm)	H1(mm)	H2(mm)	m	z	b(mm)	
011.14.0188.011.5112	188	259,36	135	35	7,5	222	16	M10	154	16	M10	187	189	30	30	4	62	26	1
011.16.0235.121.5112	235	318	169	45	14	275	20	13,5	195	20-1	M12	234	236	37	34	3	104	35	2
011.16.0258.121.5112	258	342	180	42	16	300	24	13	210	24-1	M12	257	259	35	37	3	112	30	3
011.16.0302.110.5112	302	384	238	32	14	343	20	M12	262	20	M12	301	303	30	30	4	94	30	4
011.16.0500.131.5112	500	580	440	35	22	540	28	M10	460	28	11	497	503	30	30	3	191	30	5
011.20.0289.151.5111	289	379	210	45	20	335	18	13,5	240	12-1	13,5	288	290	40	40	4	92	40	6
011.20.0307.101.5111	307	403,5	234	55	24	358	24	13	259	28-1	13	306	312	47	45	4,5	88	39	7
011.20.0342.101.5111	342	438,3	265	50	25,4	390	18	13,5	295	23	13,5	340	344	43	43	5	84	44	8
011.25.0309.001.5111	309	408,4	235	60	30	359	24	13	259	24-1	13	310	308	52,5	52,5	5	80	52,5	9
011.25.0422.001.5111	422	529	323	54	45	476	20	17,5	368	20	17,5	420	424	50	50	5	103	50	10
011.25.0537.131.5111	537	688,8	417	72	91	605	30	26/M24	469	30-1	26	533	541	63	59	6	112	62	11
011.25.0555.001.5111	555	689	455	74	89	620	30	17,5	490	30	17,5	556	554	64	64	6	112	60	12
011.25.0693.001.5111	693	838	599	91	132	752	42	18	634	42	18	690	696	68	68	10	81	68	13
011.25.0716.021.5111	716	838,8	622	68	96	775	40	17,5	657	40	17,5/M16	712	720	59	59	6	138	46	14
011.25.0764.031.5112	764	862,8	670	82	98	800	24	M16	706	24	17,5	765	763	65	61	6	142	56	15
011.25.0980.031.5112	980	1078,4	886	79	123	1015	30	M16	922	30	17,5	981	979	67	58	8	133	62	16
011.25.1295.001.5111	1295	1431	1200	63	176	1354	24	17,5	1236	24	17,5	1293	1297	54	54	8	177	54	17
011.25.1595.001.5111	1595	1727	1500	63	213	1654	24	17,5	1536	24	17,5	1594	1596	54	54	8	214	54	18
011.25.1845.031.5111	1845	1966,4	1745	68	261	1900	36	M16	1785	36	26/17,5	1843	1847	59	59	8	244	55	19
011.25.2560.001.4111	2560	2695	2425	63	411	2620	36	17,5	2500	36	17,5	2558	2562	54	54	8	335	54	20

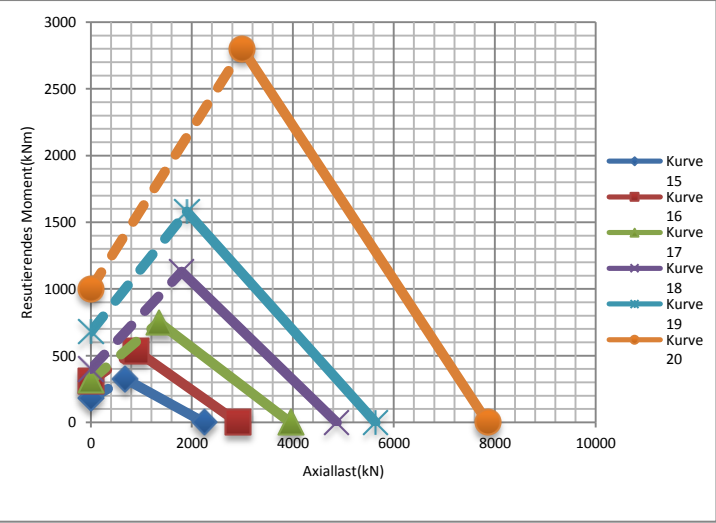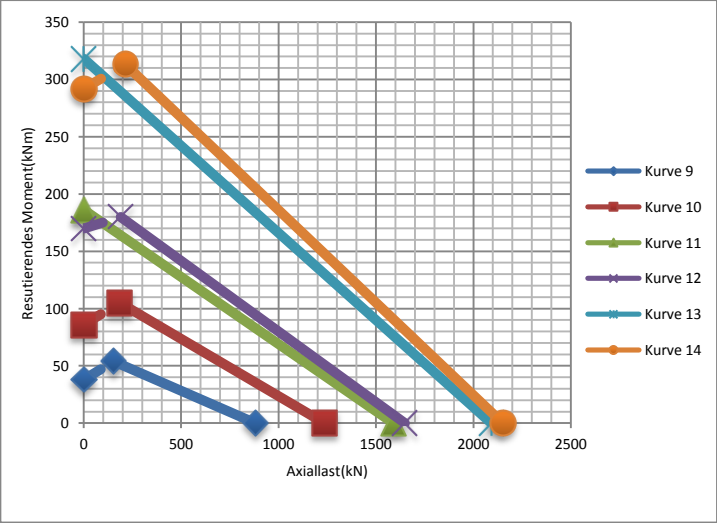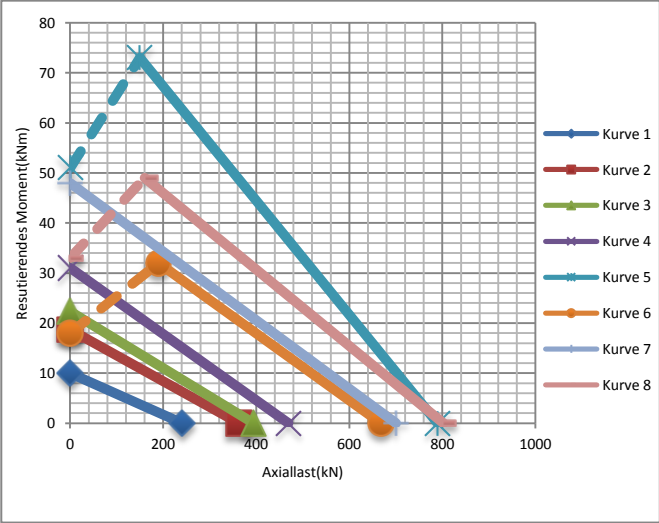




Standard Slewing Bearings

CRB Type	Raceway diameter	Outer diameter	Inner diameter	Overall height	Weight	External bolt circle diameter	Number of external bolt holes	External holes diameter	Internal bolt circle diameter	Number of internal bolt holes	Internal holes diameter	Outer Diameter of inner ring	Inner Diameter of outer ring	Outer ring height	Inner ring height	Module	Number of teeth	Teeth width	Curve
	DL (mm)	Da (mm)	Di (mm)	H (mm)	G (kg)	La (mm)	na	B/M(mm)	Li (mm)	ni	B/M(mm)	O (mm)	U (mm)	H1(mm)	H2(mm)	m	z	b(mm)	
011.20.0560.001.5112	560	670,8	479	55	53	610	20	15,5	510	20	15,5	561	559	46	46	6	109	45	3 (left)
011.20.0630.001.5112	630	742,8	543	55	61	682	20	17,5	578	20	17,5	631	629	46	46	6	121	46	4 (left)
011.20.0710.001.5112	710	820,8	623	55	67	762	24	17,5	658	24	17,5	711	709	46	46	6	134	46	5 (left)
012.20.0400.001.5112	400	475	300	55	33	448	16	13,5	352	16	13,5	399	401	46	46	5	61	46	1 (left)
012.20.0450.001.5112	450	531	345	55	38	500	16	15,5	400	16	15,5	449	451	46	46	5	70	46	2 (left)
012.20.0560.001.5112	560	641	450	55	51	610	20	15,5	510	20	15,5	559	561	46	46	6	76	46	3 (left)
012.20.0630.001.5112	630	717	516	55	59	682	20	17,5	578	20	17,5	629	631	46	46	6	87	46	4 (left)
012.20.0710.001.5112	710	797	594	55	68	762	24	17,5	658	24	17,5	709	711	46	46	6	100	46	5 (left)
011.25.0764.001.5112	764	886,8	671	63	96	823	24	17,5	706	24	17,5	765	763	54	54	6	145	54	1 (mid)
011.25.0980.001.5112	980	1110,4	887	63	124	1039	30	17,5	922	30	17,5	981	979	54	54	8	136	54	2 (mid)
011.25.1120.001.5112	1120	1278	1013	79	182	1183	30	22	1057	30	22	1121	1119	70	54	10	125	70	3 (mid)
011.25.1250.001.5112	1250	1408	1143	79	221	1313	36	22	1187	36	22	1251	1249	70	54	10	138	70	4 (mid)
010.25.0475.001.5112	475	565	385	64	50	535	30	17,5	415	30	17,5	476	474	57	57				5(right)
010.25.0555.001.5112	555	650	460	63	61	614	30	17,5	496	30	17,5	556	554	54	54				6(right)
010.30.0550.001.5112	550	650	450	75	73	615	24	22	485	24	22	548	552	65	65				7(right)
010.35.0680.001.5112	680	800	560	82	131	755	20	22	605	20	22	681	678	73	73				8(right)
010.45.0805.001.5112	805	948	662	99	215	896	30	26	714	30	26	807	803	90	90				9(right)

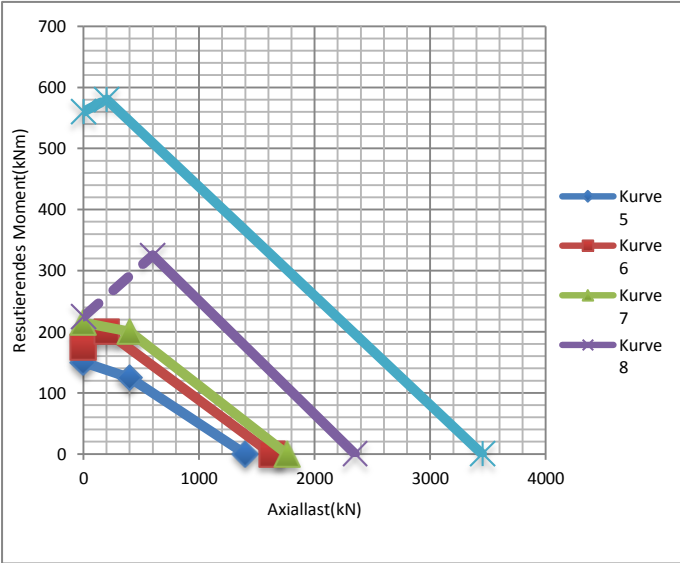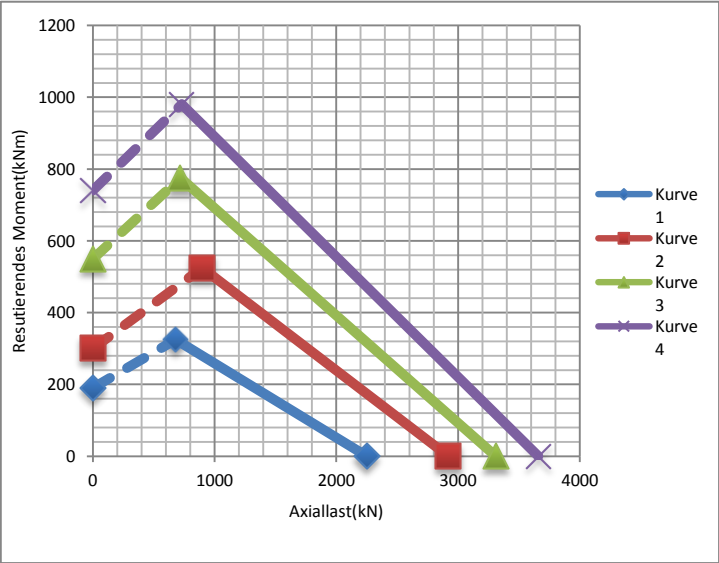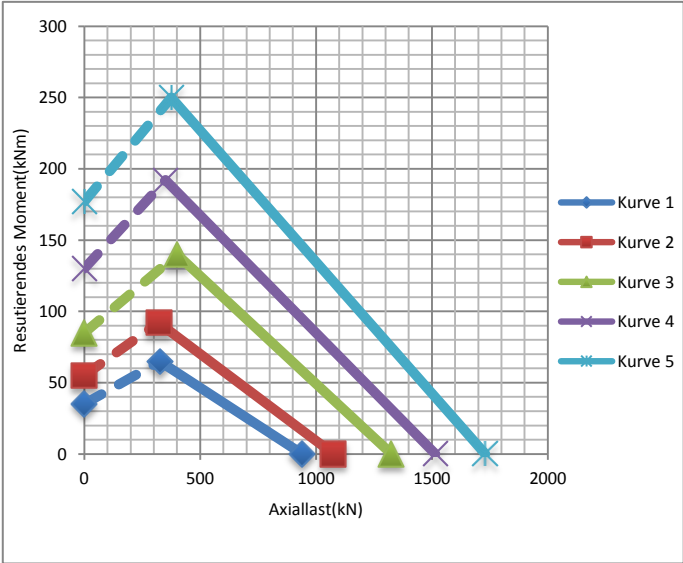




Standard Slewing Bearings

CRB Type	Raceway diameter	Outer diameter	Inner diameter	Overall height	Weight	External bolt circle diameter	Number of external bolt holes	External holes diameter	Internal bolt circle diameter	Number of internal bolt holes	Internal holes diameter	Outer Diameter of inner ring	Inner Diameter of outer ring	Outer ring height	Inner ring height	Module	Number of teeth	Teeth width	Curve
	DL (mm)	Da (mm)	Di (mm)	H (mm)	G (kg)	La (mm)	na	B/M(mm)	Li (mm)	ni	B/M(mm)	O (mm)	U (mm)	H1(mm)	H2(mm)	m	z	b(mm)	
011.30.0555.001.5112	555	689	455	74	89	620	30	17.5	490	30	17,5	553	557	64	64	6	112	60	1 (left)
011.30.0947.001.5112	947	1094	833	82	179	1015	36	22	880	36	22	945	949	72	66	8	134	72	2 (left)
011.30.1180.001.5112	1180	1338	1068	79	227	1248	36	22	1112	36	22	1181	1178	70	63	10	131	70	3 (left)
011.30.1320.001.5112	1320	1497,6	1208	89	298	1388	42	22	1252	42	22	1321	1318	80	63	12	122	80	4 (left)
011.30.1500.001.5112	1500	1677,6	1388	89	338	1568	48	22	1432	48	22	1501	1498	80	63	12	137	80	5 (left)
011.40.1050.001.5112	1050	1218	930	98	268	1125	40	22	975	40	22	1047	1053	88	80	10	119	88	1 (mid)
011.40.1180.001.5112	1180	1358	1045	98	325	1260	40	26	1100	40	26	1178	1182	88	80	10	133	88	2 (mid)
011.40.1298.001.5112	1298	1483,2	1168	105	362	1380	60	26	1216	60-1	26	1299,5	1296,5	95	82	12	120	95	3 (mid)
011.40.1400.001.5112	1400	1593,6	1266	94	404	1482	36	26	1318	36	26	1401	1398	85	81	12	130	85	4 (mid)
011.40.1600.001.5112	1600	1803,2	1466	94	479	1682	40	26	1518	40	26	1601	1598	85	81	14	126	85	5 (mid)
011.40.1800.001.5112	1800	1999,2	1666	94	531	1882	44	26	1718	44	26	1801	1798	85	81	14	140	85	6 (mid)
011.40.3031.001.4112	3031	3198	2914	90	716	3104	48	22	2958	48	22	3032	3029	77	77	10	318	77	7(right)
011.50.1410.001.5112	1410	1605	1270	110	469	1495	48	26	1325	48	26	1407	1413	100	90	12	131	100	8(right)
011.50.1712.001.5112	1712	1929	1565	110	617	1800	48	30	1625	48	30	1709	1715	100	90	14	135	100	9(right)
011.50.1900.001.4112	1900	2139,2	1729	109	820	2005	36	33	1795	36	33	1902	1898	100	99	14	150	100	10(right)
011.50.2130.001.4112	2130	2380,8	1959	109	931	2235	48	33	2025	48	33	2132	2128	100	99	16	146	100	11(right)
011.50.2355.001.4112	2355	2604,8	2184	109	1024	2460	54	33	2250	54	33	2357	2353	100	99	16	160	100	12(right)
011.50.2645.001.4112	2645	2892,8	2474	109	1142	2750	60	33	2540	60	33	2647	2643	100	99	16	178	100	13(right)

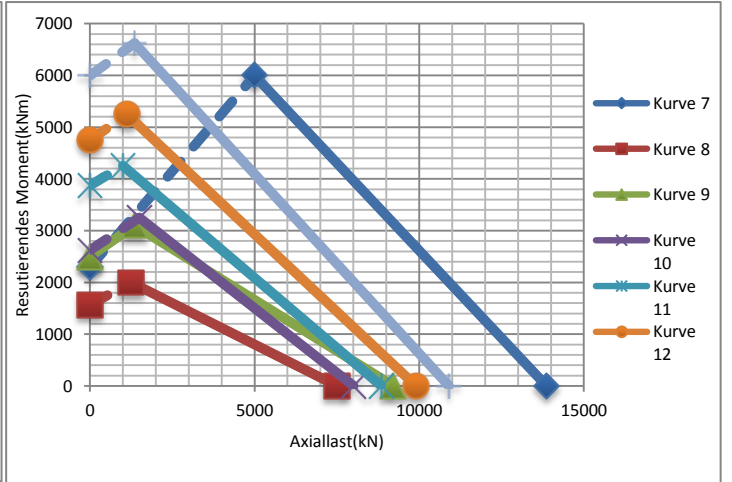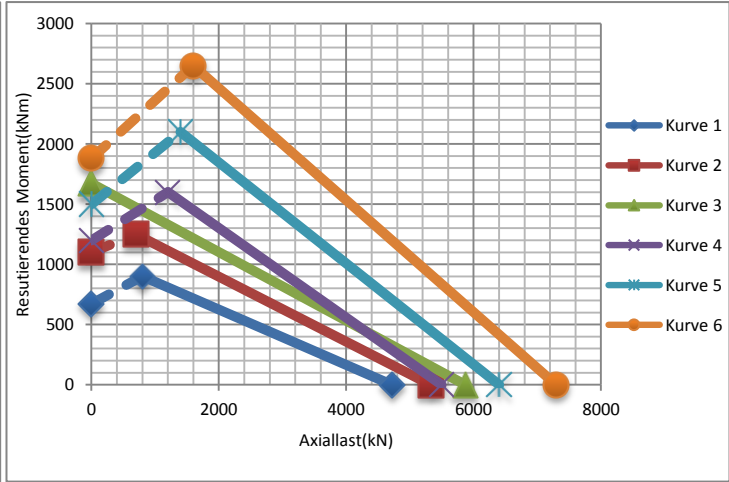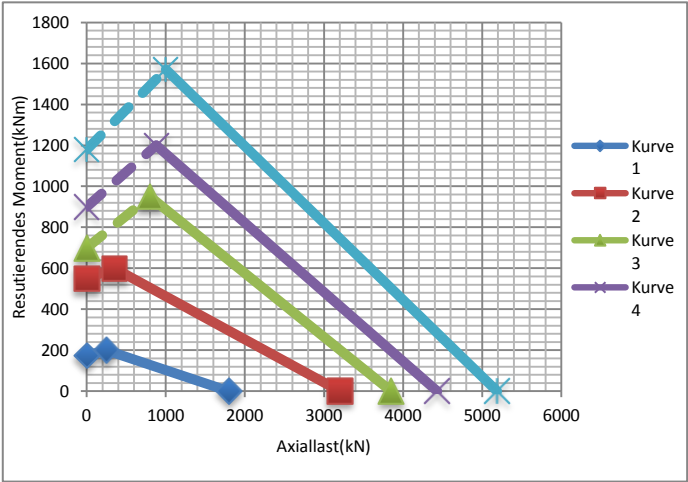




Standard Slewing Bearings

CRB Type	Raceway diameter	Outer diameter	Inner diameter	Overall height	Weight	External bolt circle diameter	Number of external bolt holes	External holes diameter	Internal bolt circle diameter	Number of internal bolt holes	Internal holes diameter	Outer Diameter of inner ring	Inner Diameter of outer ring	Outer ring height	Inner ring height	Module	Number of teeth	Teeth width	Curve
	DL (mm)	Da (mm)	Di (mm)	H (mm)	G (kg)	La (mm)	na	B/M(mm)	Li (mm)	ni	B/M(mm)	O (mm)	U (mm)	H1(mm)	H2(mm)	m	z	b(mm)	
012.25.0886.021.5112	886	980	784	77	109	944	36	17,5	850	36	M16	887	885	67	56	8	100		1
012.25.1077.021.5112	1077	1170	960	84	148	1134	36	17,5	1040	36	M16	1078	1076	66	64	10	98		2
012.25.0886.001.5112	886	980	752	63	111	944	36	17,5	827	36	17,5	885	887	54	54	8	95		1
012.25.1077.001.5112	1077	1169	930	63	140	1134	36	17,5	1017	36	17,5	1076	1078	54	54	10	94		2
012.25.1180.001.5112	1180	1287	1020	69	185	1243	36	22	1117	36	22	1179	1181	60	54	10	103		3
012.30.1120.001.5112	1120	1232	960	79	206	1188	36	22	1052	36	22	1118	1121	70	63	10	97		1
012.30.1250.001.5112	1250	1362	1090	79	231	1318	40	22	1182	40	22	1248	1251	70	63	10	110		2
012.30.1400.001.5112	1400	1512	1224	89	296	1468	44	22	1332	44	22	1398	1401	80	63	12	103		3
012.30.1600.001.5112	1600	1712	1428	89	334	1668	48	22	1532	48	22	1598	1601	80	63	12	120		4

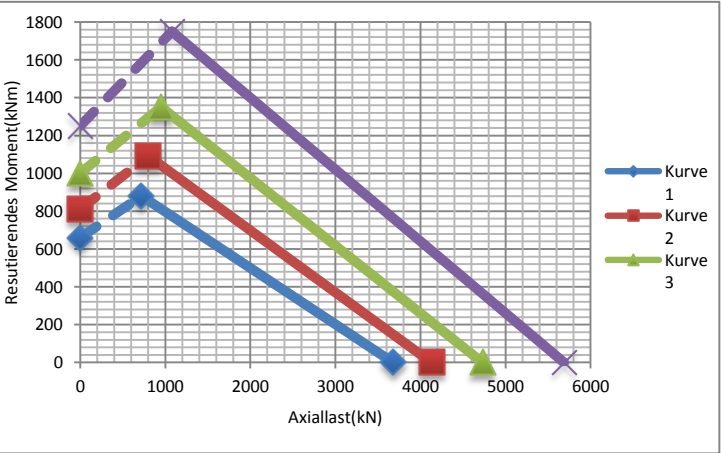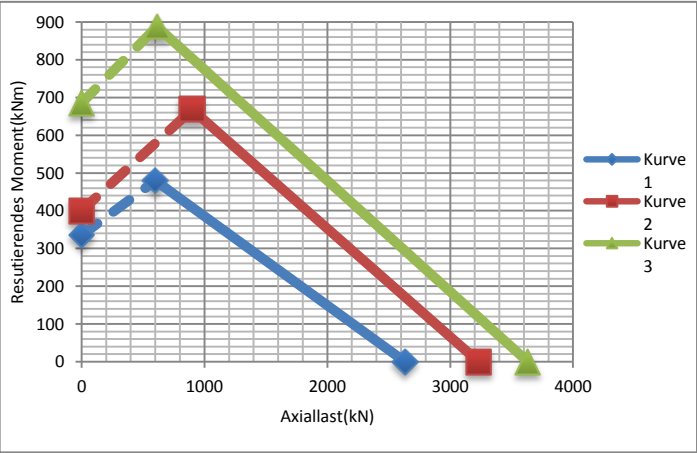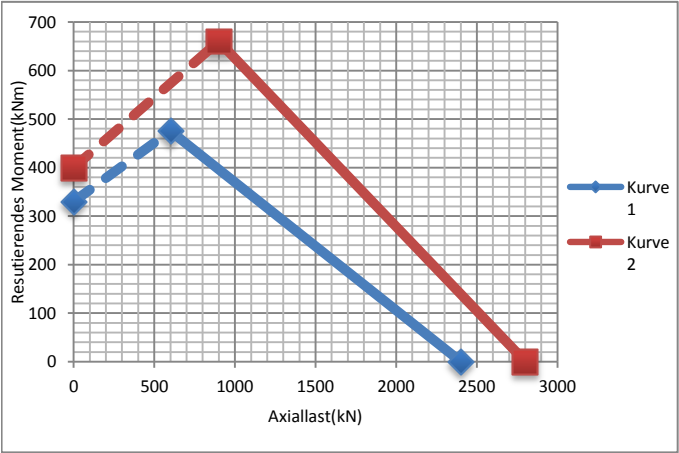





Standard Slewing Bearings

CRB Type	Raceway diameter	Outer diameter	Inner diameter	Overall height	Weight	External bolt circle diameter	Number of external bolt holes	External holes diameter	Internal bolt circle diameter	Number of internal bolt holes	Internal holes diameter	Outer Diameter of inner ring	Inner Diameter of outer ring	Outer ring height	Inner ring height	Module	Number of teeth	Teeth width	Curve
	DL (mm)	Da (mm)	Di (mm)	H (mm)	G (kg)	La (mm)	na	B/M(mm)	Li (mm)	ni	B/M(mm)	O (mm)	U (mm)	H1(mm)	H2(mm)	m	z	b(mm)	
010.30.0380.021.4192	380	485	275	55	45	453	16	18	307	16	M16	381	379	50	50				1 (left)
010.30.0560.001.5112	560	662	458	80	95	626	24	18	494	24	18	561	558	70	70				2 (left)
010.30.0980.101.5111	980	1130	845	100	280	1070	36	26	890	36	26	982	978	90	90				3 (left)
010.30.1320.001.5111	1320	1388	1208	79	225	1388	48	22	1252	48	22	1321	1319	70	63				4 (left)
010.30.1530.144.5111	1530	1633	1428	72	230	1595	24	M16	1466	24	M16	1534	1527	63	63				5 (left)
010.30.1578.101.5111	1578	1742	1445	114	501	1697	48	22	1490	48	22	1579	1577	86	86				6 (mid)
010.30.1815.101.5111	1815	1935	1700	78	328	1887	36	17,5	1747	36	17,5	1816	1813	66	66				7 (mid)
010.30.1835.101.5111	1835	1945	1725	75	305	1900	32	22	1770	32	22	1836	1834	66	66				8 (mid)
010.30.2350.001.4111	2350	2474	2226	79	480	2430	54	22	2270	54	22			70	70				9 (mid)
010.50.3145.031.4111	3145	3316	2974	113	1204	3248	72	M30	3042	72	33	3143	3147	104	104				1(right)
010.50.3700.001.4111	3700	3870	3530	132	1632	3805	68	26	3595	68	26	3702	3698	104	122				2(right)
010.60.1500.101.4112	1500	1683	1317	119	656	1617	24	33	1383	24	33			109	109				3(right)
010.60.4587.101.4122	4587	4794	4380	126	2424	4716	72	39	4458	72	39	4584	4592	117	117				4(right)
010.70.2300.100.4111	2300	2488	2110	146	1553	2423	60	33	2177	60	33			136	136				5(right)
010.70.4958.132.4112	4958	5180	4700	197	5097,4	5070	72	M36	4780	72	39	4954	4962	180	180				6(right)
010.70.6000.129.4111	6000	6226	5774	180	6000	6130	80	M27	5860	80	M27								7(right)

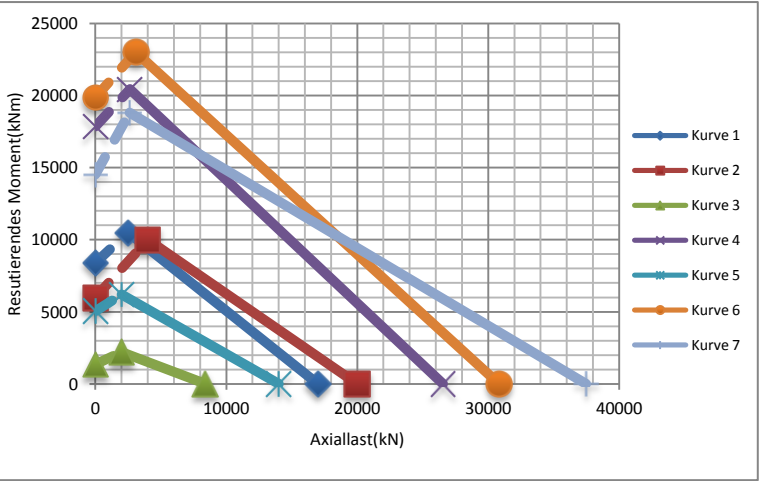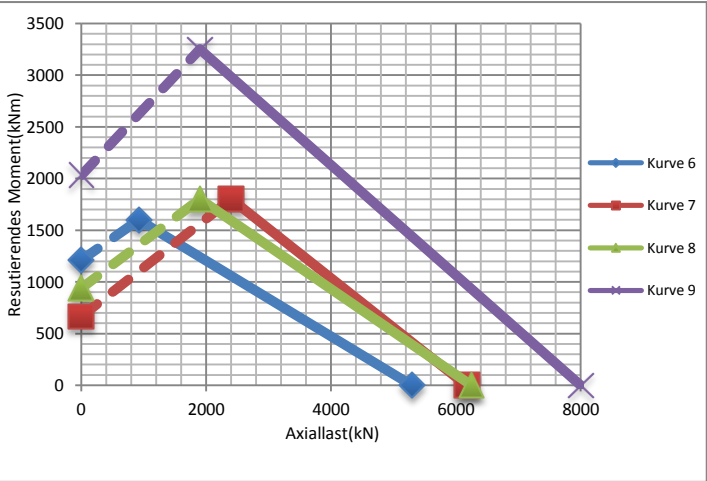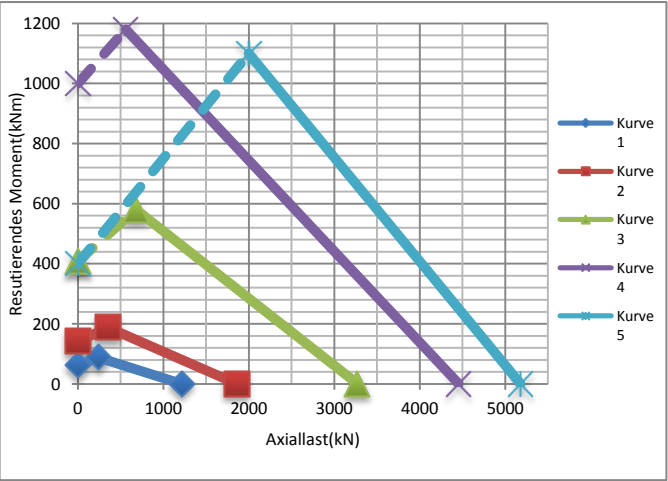



Standard Slewing Bearings

CRB Type	Raceway diameter	Outer diameter	Inner diameter	Overall height	Weight	External bolt circle diameter	Number of external bolt holes	External holes diameter	Internal bolt circle diameter	Number of internal bolt holes	Internal holes diameter	Outer Diameter of inner ring	Inner Diameter of outer ring	Outer ring height	Inner ring height	Module	Number of teeth	Teeth width	Curve
	DL (mm)	Da (mm)	Di (mm)	H (mm)	G (kg)	La (mm)	na	B/M(mm)	Li (mm)	ni	B/M(mm)	O (mm)	U (mm)	H1(mm)	H2(mm)	m	z	b(mm)	
012.40.1050.001.5112	1050	1170	882	98	258	1125	40	22	975	40	22	1052	1048	88	80	10	89	88	5(left top)
012.40.1225.001.5112	1225	1360	1052	98	321	1303	40	26	1147	40	26	1227	1223	88	80	10	106	88	6(left top)
012.40.1500.001.5112	1500	1634	1308	94	410	1582	40	26	1418	40	26	1498	1501	85	81	12	110	85	7(left top)
012.40.1700.001.5112	1700	1834	1498	94	475	1782	44	26	1618	44	26	1698	1701	85	81	14	108	85	8(left top)
012.40.3074.001.4112	3074	3190	2914	90	735	3150	48	22	2998	48	22	3076	3072	80	80	8	366	80	9(right top)
012.50.1415.001.5112	1415	1560	1215	110	471	1500	48	26	1330	48	26	1417	1413	100	90	12	102	100	1(left below)
012.50.1715.001.5112	1715	1870	1501	110	607	1804	48	30	1626	48	30	1717	1713	100	90	14	108	100	2(left below)
012.50.1800.001.5112	1800	1971	1554	109	762	1905	36	33	1695	36	33	1798	1802	100	99	14	112	100	3(left below)
012.50.2000.001.4112	2000	2171	1764	109	843	2105	40	33	1895	40	33	1998	2002	100	99	14	127	100	4(left below)
012.50.2240.001.4112	2240	2411	1984	109	961	2345	48	33	2135	48	33	2238	2242	100	99	16	125	100	5(right below)
012.50.2490.001.4112	2490	2661	2240	109	1053	2595	54	33	2385	54	33	2488	2492	100	99	16	141	100	6(right below)
012.50.2800.001.4112	2800	2971	2544	109	1205	2905	60	33	2695	60	33	2798	2802	100	99	16	160	100	7(right below)
012.60.2022.001.4112	2022	2195	1780	130	979	2123	48	33	1921	48	33	2025	2019	120	110	16	112	120	8(right below)
012.60.2618.001.4112	2618	2785	2362	130	1270	2720	72	33	2517	72	33	2622	2614	120	110	18	132	120	9(right below)

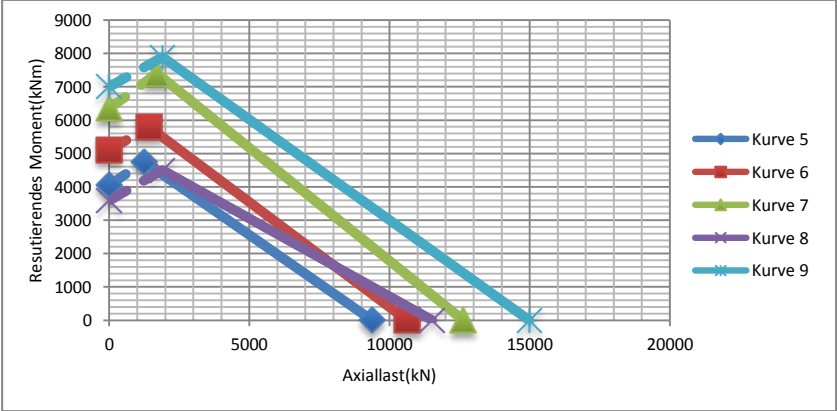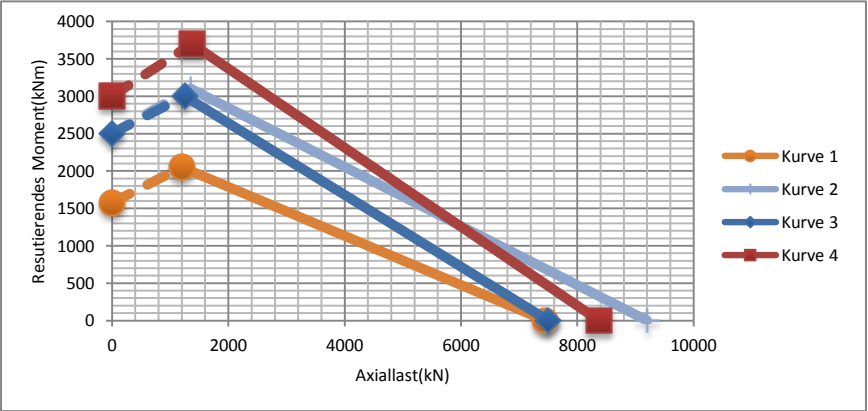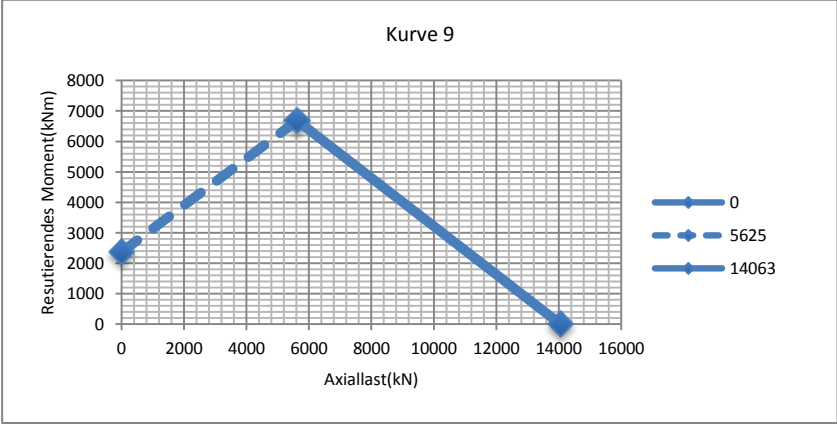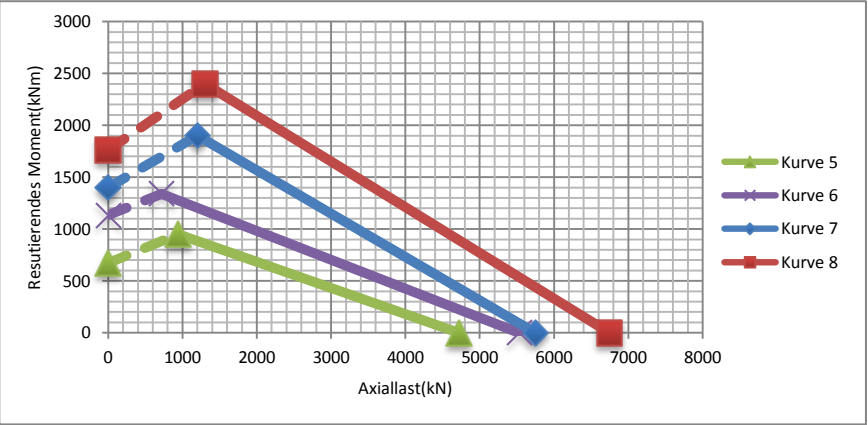




Standard Slewing Bearings

CRB Type	Raceway diameter	Outer diameter	Inner diameter	Overall height	Weight	External bolt circle diameter	Number of external bolt holes	External holes diameter	Internal bolt circle diameter	Number of internal bolt holes	Internal holes diameter	Outer Diameter of inner ring	Inner Diameter of outer ring	Outer ring height	Inner ring height	Module	Number of teeth	Teeth width	Curve
	DL (mm)	Da (mm)	Di (mm)	H (mm)	G (kg)	La (mm)	na	B/M(mm)	Li (mm)	ni	B/M(mm)	O (mm)	U (mm)	H1(mm)	H2(mm)	m	z	b(mm)	
011.32.0675.001.5112	675	838	574	90	137	753	36	22	604	36-1	22	673	682	73	70	10	81	73	2
011.32.0765.011.5112	765	863	679	82	102	800	24	M16	706	24	17,5/M16	763	767	68	65	6	142	60	3
011.32.0823.001.5112	823	979	715	100	177	893	36	22	753	36-1	22	820	826	79	82	10	94	63	4
011.32.0880.001.5112	880	1022	770	82	159	945	36	22	815	36	22	878	882	72	66	8	125	82	5
011.32.0957.031.5112	957	1138	840	131	324	1030	42	M20	885	42-1	22	954	959	107	104,5	12	91	92	6
011.32.1160.031.5112	1160	1350	1008	112	429	1240	40	30/M27	1075	40	43/30	1158	1162	103	103	10	132	95	7
011.32.1600.001.5112	1600	1803,2	1466	94	479	1682	40	26	1518	40	26	1601	1598	85	81	14	126	85	8
011.32.2040.001.4112	2040	2165	1950	68	278	2090	36	17,5	1985	36	17,5	2038	2042	59	59	8	269	55	9
011.32.2202.001.4112	2202	2342	2091	70	373	2262	36	22	2142	36	22	2200	2204	62	62	8	290	62	10
011.60.1895.001.4112	1895	2140	1720	130	953	1996	48	33	1794	48	33	1891	1899	120	110	16	131	120	11
011.60.2130.001.4112	2130	2390	1950	130	1111	2235	60	33	2025	60-1	33	2126	2134	120	110	18	130	120	12

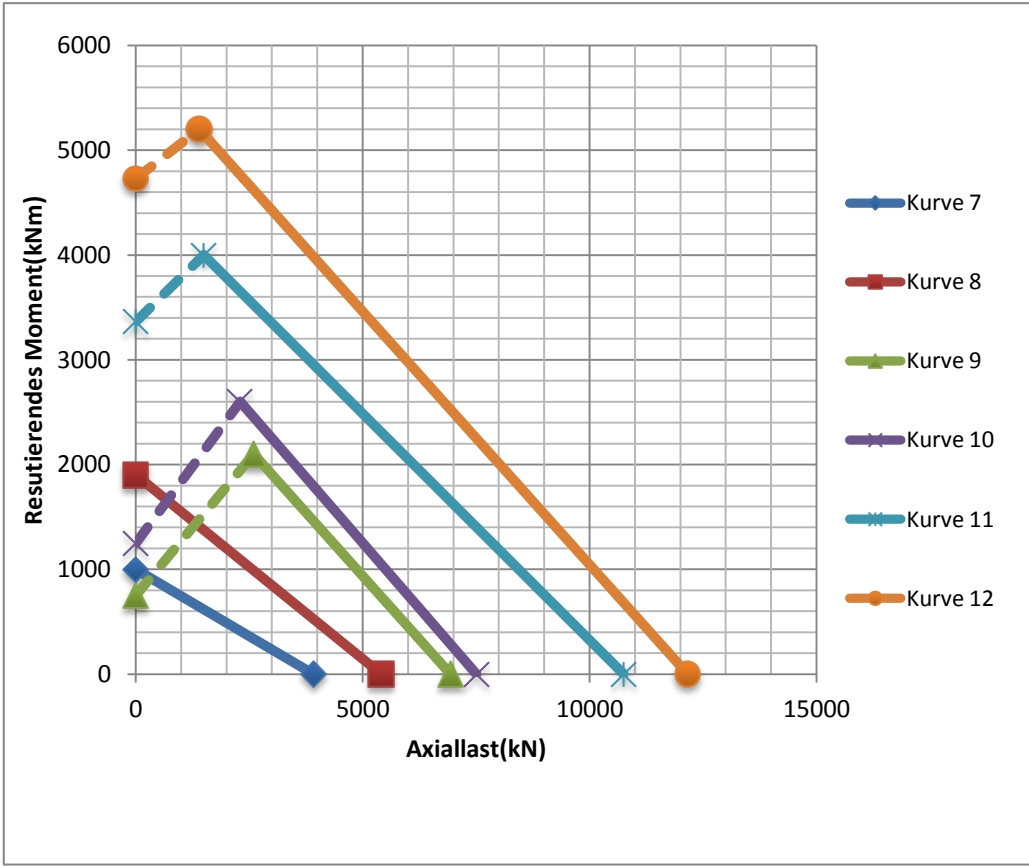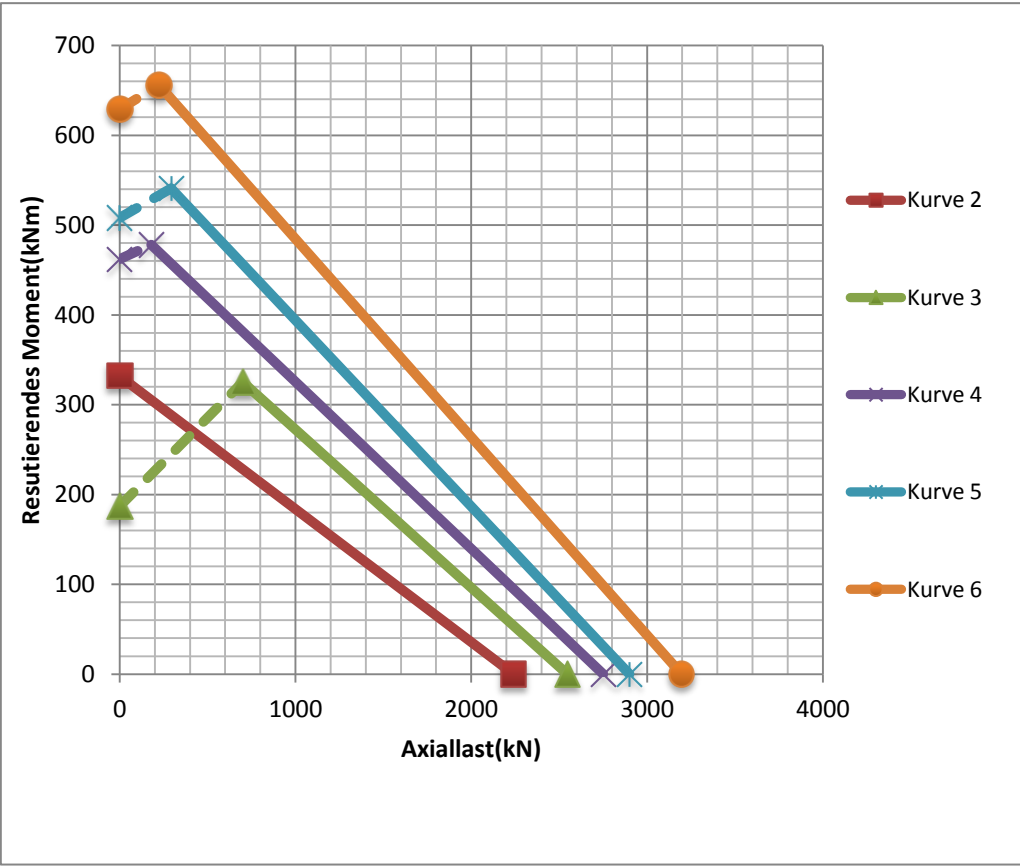

Standard Slewing Bearings

CRB Type	Raceway diameter	Outer diameter	Inner diameter	Overall height	Weight	External bolt circle diameter	Number of external bolt holes	External holes diameter	Internal bolt circle diameter	Number of internal bolt holes	Internal holes diameter	Outer Diameter of inner ring	Inner Diameter of outer ring	Outer ring height	Inner ring height	Module	Number of teeth	Teeth width	Curve
	DL (mm)	Da (mm)	Di (mm)	H (mm)	G (kg)	La (mm)	na	B/M(mm)	Li (mm)	ni	B/M(mm)	O (mm)	U (mm)	H1(mm)	H2(mm)	m	z	b(mm)	
012.16.0245.001.5112	245	300	174,5	40	10	280	20	11	210	20	11	246	244	32	32	3	60	32	1
012.16.0288.001.5112	288	340	216	39	12	324	20	9	252	20	9	288	288	34	34	4	56	34	2
012.16.0344.001.5112	344	410	256	39	24	386	16	20/14	302	16	20/14	347	341	34	34	4	66	34	3
012.16.0420.001.5112	420	486	332	39	24	462	16	14	378	16	14	420	420	34	34	4	85	34	4
012.22.0308.001.5112	308	385	217	55	24	358	24	13,5	259	24	13,5	309	307	45	45	4	56	40	5
012.22.0782.021.5112	782	868	656	77	103	834	24	18	730	24	18/M16	784	780	70	50	8	82	64	6
012.22.0850.021.5112	850	936	738	75	100	902	24	18	800	24	18/M16	852	848	65	50	6	124	57	7
012.22.1131.031.5112	1131	1213	1015	66	127	1181	40	18/M16	1081	40	18	1133	1129	54	56	7	146	54	8
012.25.0422.001.5112	422	515	316	54	44	476	20	17,5	368	20	17,5	424	420	50	50	5	64	50	9
012.25.0520.001.5112	520	610	403	68	63	574	24	17,5	466	24	17,5	522	518	60	54	6	68	60	10
012.25.0889.021.5112	889	980	784	82	126	944	36	17,5	850	36	M16	891	887	72	67	8	100	66	11
012.25.1295.001.5112	1295	1390	1162	63	171	1354	24	17,5	1236	24	17,5	1297	1293	54	54	8	146	54	12
012.25.2560.001.4112	2560	2695	2426	63	414	2620	36	17,5	2500	36	17,5	2563	2557	54	54	8	304	54	13

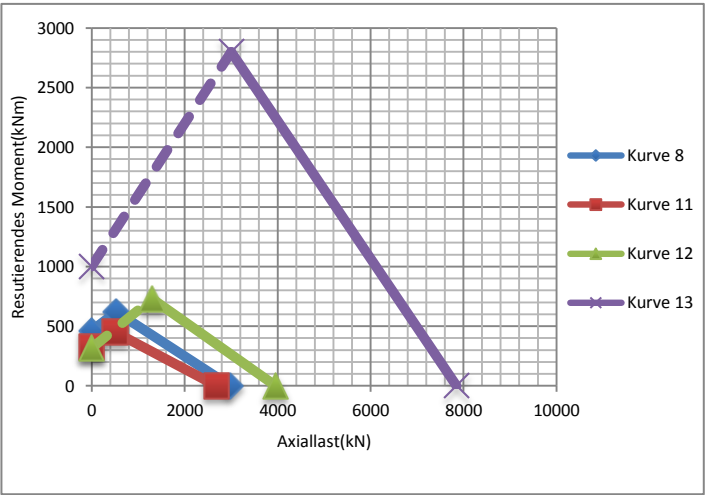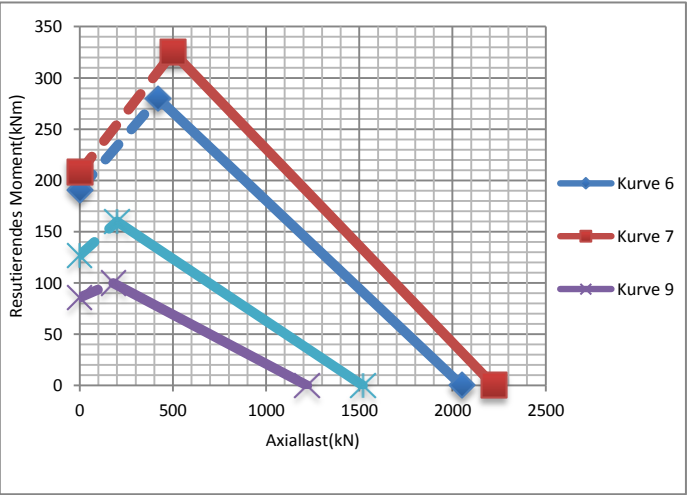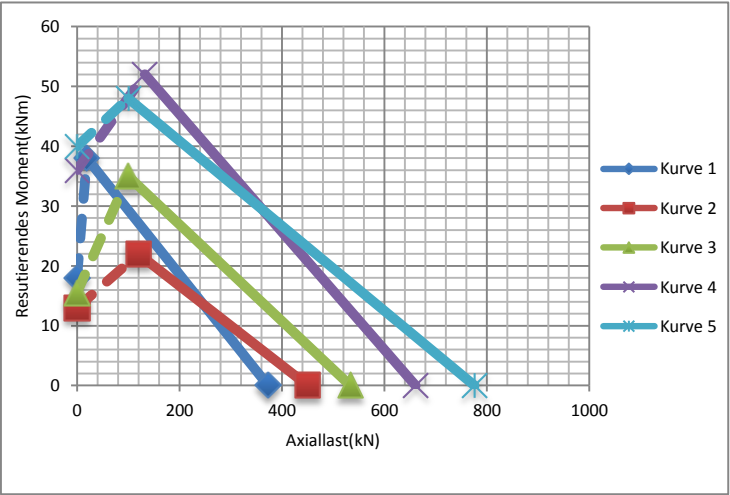

Standard Slewing Bearings

CRB Type	Raceway diameter	Outer diameter	Inner diameter	Overall height	Weight	External bolt circle diameter	Number of external bolt holes	External holes diameter	Internal bolt circle diameter	Number of internal bolt holes	Internal holes diameter	Outer Diameter of inner ring	Inner Diameter of outer ring	Outer ring height	Inner ring height	Module	Number of teeth	Teeth width	Curve
	DL (mm)	Da (mm)	Di (mm)	H (mm)	G (kg)	La (mm)	na	B/M(mm)	Li (mm)	ni	B/M(mm)	O (mm)	U (mm)	H1(mm)	H2(mm)	m	z	b(mm)	
012.32.0720.001.5112	720	835	578	82	130	786	30	22	654	30	22	722	718	72	66	8	73	72	1
012.32.0820.001.5112	820	935	674	82	150	886	32	22	754	32	22	822	818	72	66	8	85	72	2
012.32.0935.001.5112	935	1050	794	82	168	1000	36	22	870	36	22	937	933	72	66	8	100	72	3
012.32.1128.021.5112	1128	1260	933	90	280	1210	40	28	1045	40	30/M27	1131	1125	80	72	12	77	80	4
012.32.1159.001.5112	1159	1286	980	94	269	1234	42	26	1084	42	26	1157	1160	75	76	10	100	75	5
012.32.1384.021.5112	1384	1517	1176	102	432	1465	48	26	1305	48	26/M24	1382	1385	93	68	14	85	93	6
012.32.1400.021.5112	1400	1512	1224	89	289	1468	60	25	1332	60	26/M24	1398	1401	80	63	12	103	80	7
012.32.1565.001.5112	1565	1676	1422	78	278	1636	36	17,5	1506	36	17,5	1568	1562	70	62	10	144	70	8
012.32.1582.021.5112	1582	1722	1360	95	469	1670	60	26	1500	60	26/M24	1580	1583	86	77	16	86	85	9
012.32.1805.001.5112	1805	1916	1662	78	324	1876	24	17,5	1746	24	17,5	1808	1802	70	62	10	168	70	10
012.32.2040.001.4112	2040	2130	1906	68	290	2090	36	17,5	1985	36	17,5	2043	2037	59	59	8	239	59	11
012.32.2202.001.4112	2202	2298	2066	70	343	2262	36	17,5	2142	36	17,5	2205	2199	62	62	8	259	62	12

